




2500 Family

2520 Project In

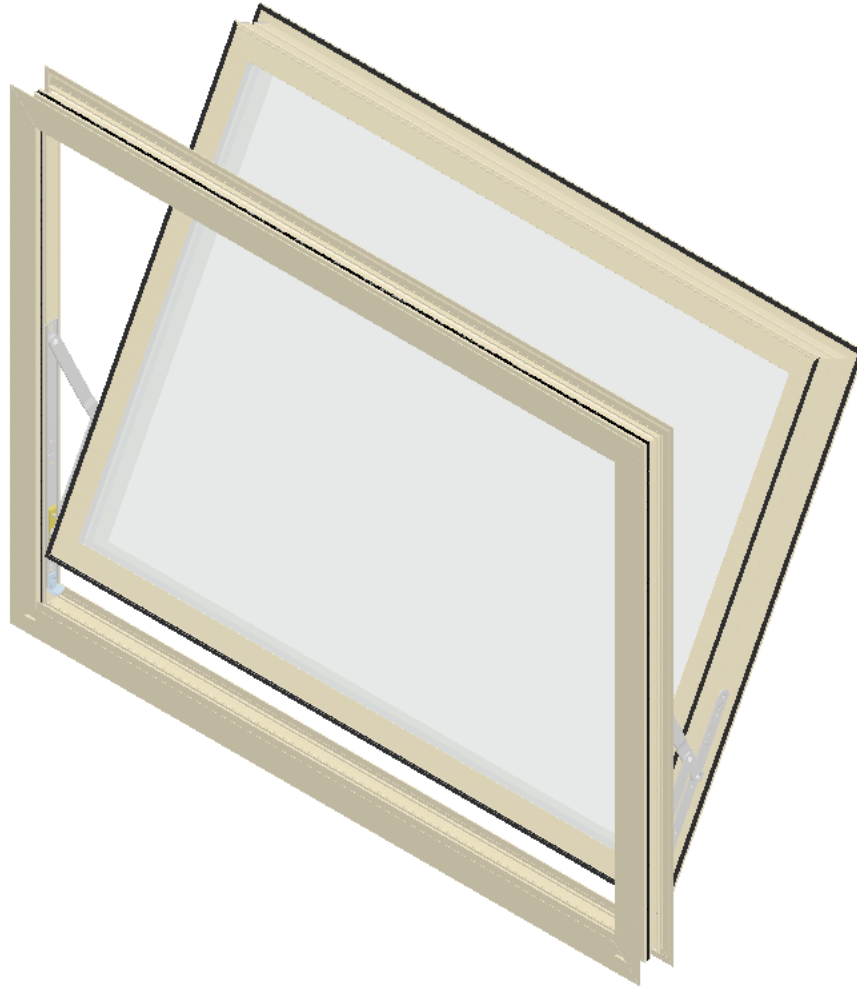

2520 PI Performance Data

Rating	CW-PG60-AP
Air Infiltration	<.01 cfm/ft ² @ 1.57 PSF
Water Resistance	No Leakage @ 12 PSF
Structural Performance	+/- 90 PSF
Frame Depth	2-7/16"
Thermally Broken	Yes
Infill Options	1/4" & 1"