


PROJECT OUT - PO

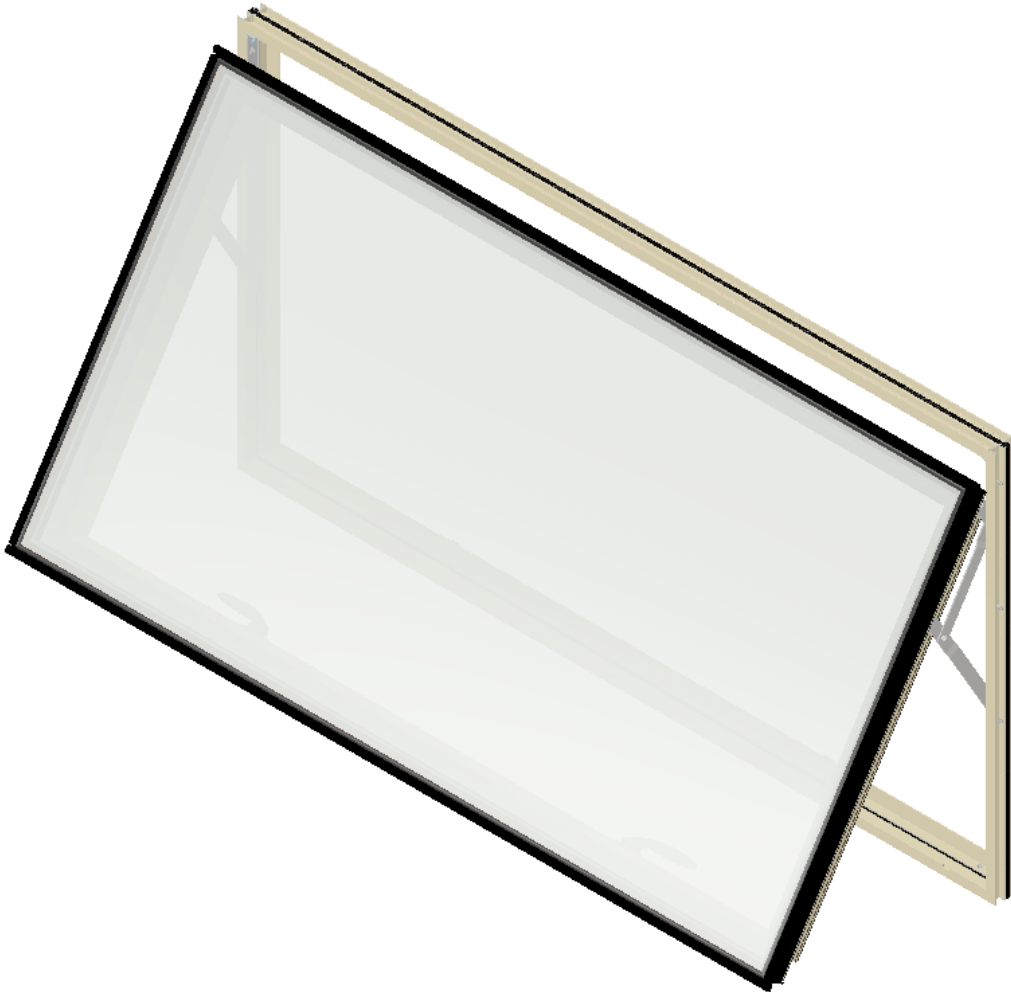

Z-Vent PO Performance Data

Rating	AW-PG60-AP
Air Infiltration	.04 cfm/ft ² @ 6.27 PSF
Water Resistance	No Leakage @ 12 PSF
Structural Performance	+/- 90 PSF
Overall Depth	3-7/16"
Thermally Broken	Yes
Infill Options	1"
U-Value	.33*
CRF	74

Roto Operator Available

Contact WinTech for further thermal performance information.