

WINTECH

ACCESS DOORS

AD4000T 4" Thermal Fixed Access Door Submittal Form

Specification of Materials Used

Door Construction – 45° degree mitered corners with screw spline assembly:

Aluminum Extrusions – Aluminum made of 6063-T5 with minimum wall thickness .060.

Thermal Break – Consists of BASF ELASTOCAST® ISOCYANATE 2 part thermal Pour and Debridge.

Foam Door Insulation – Made from BASF AUTOFROTH® 2 part Expandable Polyurethane Foam. Density of 2.40 lbs/f³, and thermal properties of K = 1.90; R_{Foam Only} = 21.0.

Door Panel Skins:


Interior Skin: _____

Exterior Skin: _____

View Port Glass (if applicable):

- View Port No View Port
 8" x 8" 8" x 12" 12" x 12" (*Viewing Size*)
 Other: _____

Make up: _____

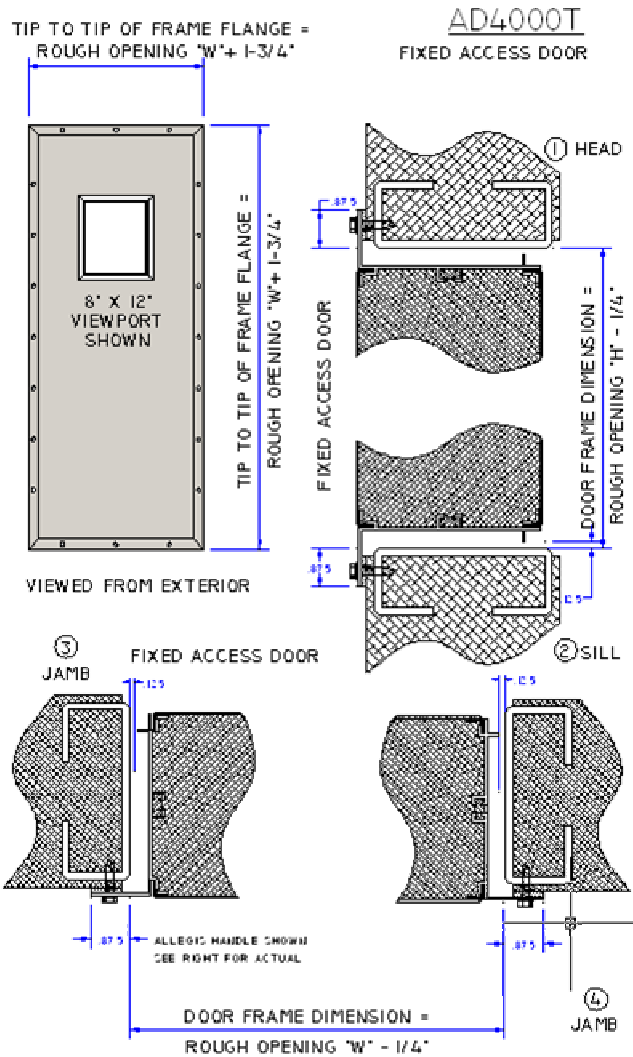

Note and Special Instructions

- ~ Unless otherwise noted, all doors are as viewed from exterior.
- ~ Unless otherwise noted, all doors are dimensioned 1/4" less than clear or rough opening.
- ~ Refer to WinTech Installation Manual for door mounting, maintenance, and cleaning.
- ~ Details are not to scale.

Customer Information:

Project:
Customer:
Engineer:
Contractor: