










OZARKVIEW SERIES DATA SHEET

Type	FGIA/ AAMA RATING	Test Size (in.)	Design Pressure (psf)	Water (psf)	Air (cfm/sf @1.57 psf)	U-Factor* (btu/h-ft ² -°F)	CR or CRF	STC/ OITC*
								
Horizontal Slider	LC-PG50-HS	70 x 56	50	7.5	0.06	0.28	62	n/a

**Performance varies based on glass selection, contact WinTech for project specific performance. U-Factor based on 3/4" IGU with soft-coat low-e and argon.*

WinTech's products are tested and certified in a controlled laboratory environment. Field performance will vary due to installation methods, environmental conditions, and product configuration.

STANDARD FEATURES:


- Material: Vinyl
- Frame Depth: 3-1/4"
- Typical Wall Thickness: 1/16"
- Standard Infill Options: 3/4" or 7/8"
- Std. Hardware: Sweep lock; Rollers
- Min Size:
 - XO or OX: 32" x 18"
 - XOX: 63" x 18"
- Max Size:
 - XO or OX: 72" x 60"
 - XOX: 108" x 60"

COLOR OPTIONS:

Exterior	Interior
White	White
Tan	Tan
Black	

SPECIFICATIONS:

- AAMA/WDMA/CSA/101/I.S.2/A440 (NAFS)
- AAMA 1503
- AAMA 2604 & 2605
- NFRC 100/200/500
- ASTM E90
- ASTM E1332

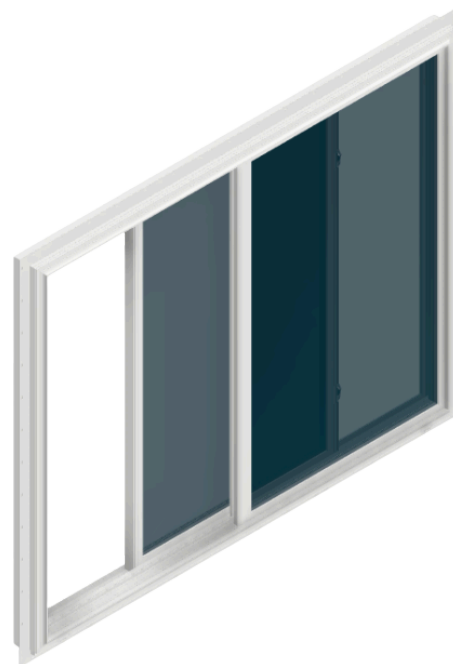

CONFIGURATIONS:

