



**WINTECH**  
An Employee Owned Company

**RIDGEVIEW**

**Fixed Vinyl**

**2-5/8" Frame Depth**

## RIDGEVIEW SERIES DATA SHEET

Type	FGIA/ AAMA RATING	Test Size (in.)	Design Pressure (psf)	Water (psf)	Air (cfm/sf @1.57 psf)	U-Factor* (btu/h-ft <sup>2</sup> -F)	CR or CRF	STC/ OITC*
Fixed	CW-PG40-FW	60 x 60	40	4.6	<0.01	0.27	61	n/a

\*Performance varies based on glass selection, contact WinTech for project specific performance. U-Factor based on 3/4" IGU with soft-coat low-e and argon.

WinTech's products are tested and certified in a controlled laboratory environment. Field performance will vary due to installation methods, environmental conditions, and product configuration.

### STANDARD FEATURES:

- Material: Vinyl
- Frame Depth: 2-5/8"
- Typical Wall Thickness: 1/16"
- Standard Infill Options: 11/16" or 3/4"
- Min Size:
  - 11-9/16" x 25"
- Max Size:
  - 60" x 72"

### INTEGRAL FIN OPTIONS:


- Standard Nail Fin
- Exterior Fin
- Interior Fin

### COLOR OPTIONS:

Exterior	Interior
White	White
Tan	Tan

### SPECIFICATIONS:

- AAMA/WDMA/CSA/101/I.S.2/A440 (NAFS)
- AAMA 1503
- AAMA 2604 & 2605
- NFRC 100/200/500
- ASTM E90
- ASTM E1332

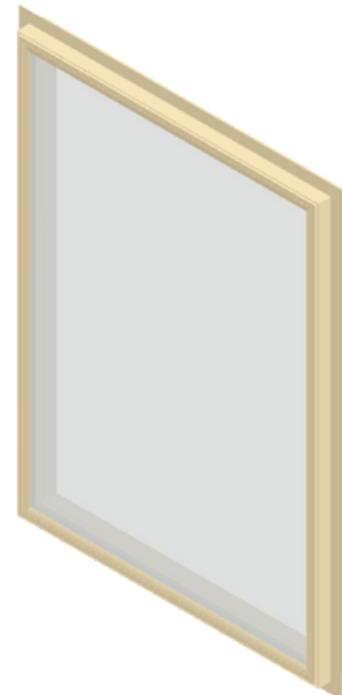

### CONFIGURATIONS:

