










RIDGEVIEW SERIES DATA SHEET

Type	FGIA/ AAMA RATING	Test Size (in.)	Design Pressure (psf)	Water (psf)	Air (cfm/sf @ 1.57 psf)	U-Factor* (btu/h-ft ² -°F)	CR or CRF	STC/ OITC*
								
Horizontal Slider	LC-PG30-HS	71 x 56	30	4.6	0.03	0.28	63	n/a

**Performance varies based on glass selection, contact WinTech for project specific performance. U-Factor based on 3/4" IGU with soft-coat low-e and argon.*

WinTech's products are tested and certified in a controlled laboratory environment. Field performance will vary due to installation methods, environmental conditions, and product configuration.

STANDARD FEATURES:

- Frame Depth: 2-5/8"
- Typical Wall Thickness: 1/16"
- Standard Infill Options: 11/16" or 3/4"
- Std. Hardware: Sweep lock; Rollers
- Min Size:
 - XO or OX: 29" x 16"
 - XOX: 50" x 16"
- Max Size:
 - XO or OX: 71" x 56"
 - XOX: 96" x 56"

INTEGRAL FIN OPTIONS:


- Standard Nail Fin
- Interior Fin
- Exterior Fin

COLOR OPTIONS:

Exterior	Interior
White	White
Tan	Tan

SPECIFICATIONS:

- AAMA/WDMA/CSA/101/I.S.2/A440 (NAFS)
- AAMA 1503
- AAMA 2604 & 2605
- NFRC 100/200/500
- ASTM E90
- ASTM E1332

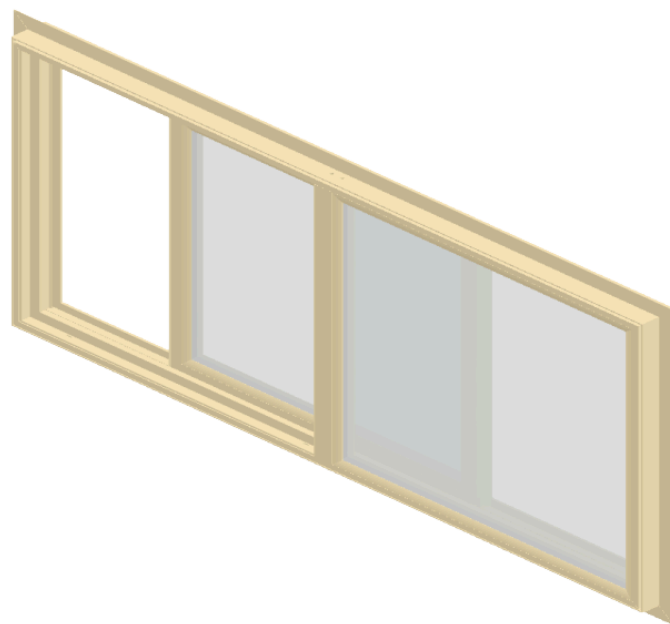

CONFIGURATIONS:

