










S251 SERIES DATA SHEET

Type	FGIA/ AAMA RATING	Test Size (in.)	Design Pressure (psf)	Water (psf)	Air (cfm/sf @1.57 psf)	U-Factor* (btu/h-ft ² -°F)	CRF	STC/ OITC*
								
Casement	CW-PG60-C	36 x 60	60	12	<0.01	N/A	N/A	N/A

**Performance varies based on glass selection, contact WinTech for project specific performance. U-Factor based on 5/8" IGU with soft-coat low-e and argon.*

WinTech's products are tested and certified in a controlled laboratory environment. Field performance will vary due to installation methods, environmental conditions, and product configuration.

STANDARD FEATURES:


- Material: Aluminum
- Frame Depth: 2-7/16"
- Typical Wall Thickness: 1/16"
- Standard Infill Options: 1" & 1/4"
- Min Size:
 - 12" x 14"
- Max Size:
 - 32" x 60"
- Std Hardware: 4-Bar Arms & Cam Locks

ACCESSORIES:

- Subframe/receptor system
- Panning
- Interior Trim
- Mullions
- Integral Nail Fin

SPECIFICATIONS:

- AAMA/WDMA/CSA/101/I.S.2/A440 (NAFS)
- AAMA 1503
- AAMA 2604 & 2605
- NFRC 100/200/500
- ASTM E90
- ASTM E1332

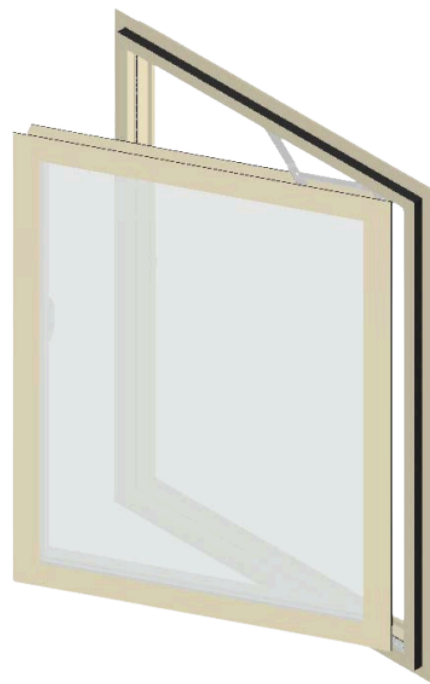

CONFIGURATIONS:

